

Dimmable LED SPOT COB GU10





5.5W=35W ALU

Product feature

- ◆ Adopting LUMINUS COB LED delivers a uniform luminance.
- ◆ High CRI 85. Models with CRI 95 also available which makes colors look vibrant and especially rich.
- ◆ Extremely high efficiency of the driver up to 90%. Lumens of natural white up to 460lm, and of warm white up to 420lm.
- ◆ Perfect dimmable down to 5% with most trailing edge and leading edge dimmers and dimming systems.
- ◆ Unique soft start when connecting with trailing edge dimmer protect and comfort your eyes well.

Model Number	Power Consumption	LED	CRI	Efficiency (lm/W)	Color Temperature	Beam Angle	Input Voltage	PFC	Light Intensity	Lumens	Dimmable
40090012-DIM (WW)	5.5W	LUMINUS	85	76	2700±200K	36°	220-240VAC	>0.9	850 cd	420 lm	YES
40090014-DIM (NW)	5.5W	LUMINUS	85	83	4000±200K	36°	220-240VAC	>0.9	950 cd	460 lm	YES
40090015-DIM (CW)	5.5W	LUMINUS	85	83	5000±200K	36°	220-240VAC	>0.9	950 cd	460 lm	YES

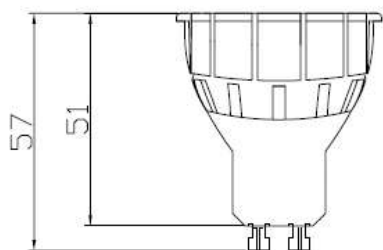

Application

- Area: Indoor use only.
- Purpose: Accent lighting, local lighting.
- General lighting
- Hotel
- Hall / Lobby
- Jewelry store
- Theater
- BAR/Restaurant
- Store
- Art gallery
- Museum
- School

Dimmable LED Spot COB GU10



General characteristics

Model Number	Product name	Material	Base Type	IP Rating	Dimension (mm)	Net Weight	Lifetime (hr)	Working Temperature
40090012-DIM(WW)	LED Spot GU10	Aluminum	GU10	IP20	Φ49.8x57	56g	40000	-5°C ~ +35°C
40090014-DIM(NW)	LED Spot GU10	Aluminum	GU10	IP20	Φ49.8x57	56g	40000	-5°C ~ +35°C

Packaging information

Packing: 100 PCS / carton		
Box	52x52x70(mm)	71 g
Carton	46x29x25.5(cm)	8.2 kg

40090012-DIM-GU10(WW) 36°

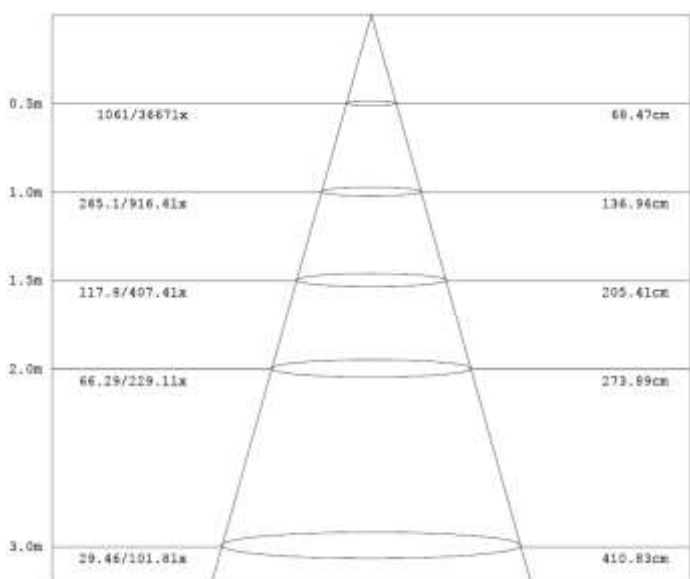
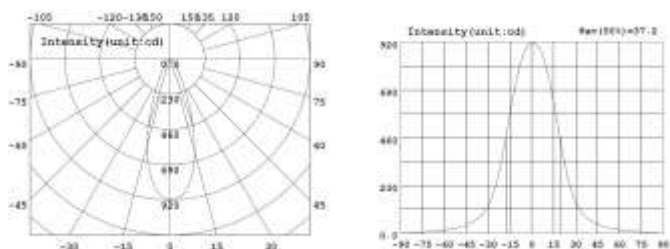


Height

Lux

Diameter

40090014-DIM-GU10(NW) 36°

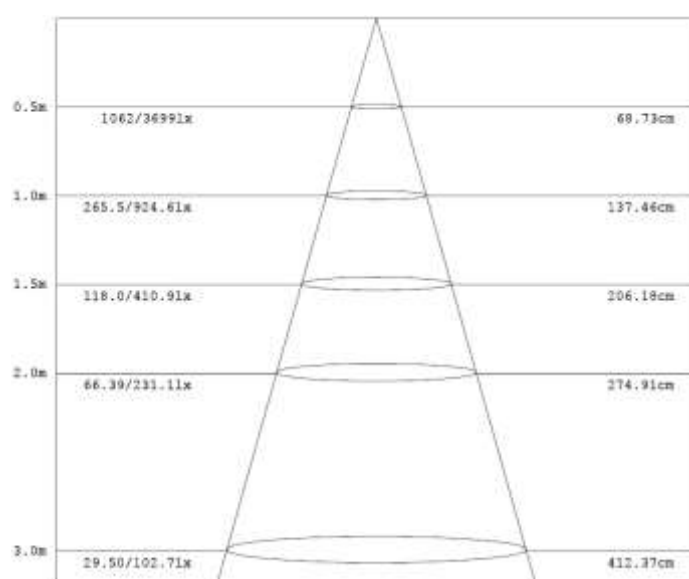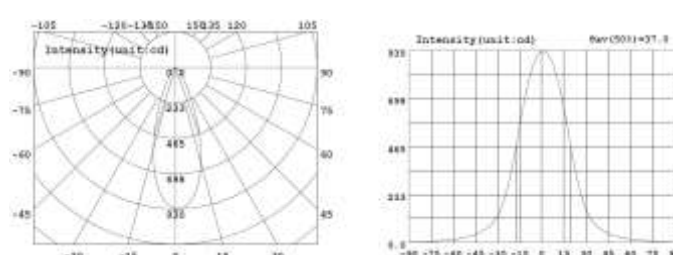



Height

Lux

Diameter



Dimmable LED Spot COB GU10

40090012-DIM-GU10(WW) 110°

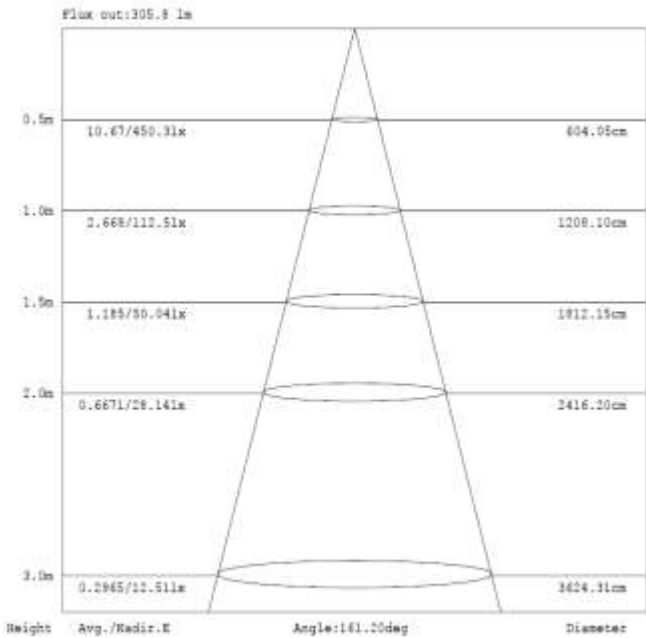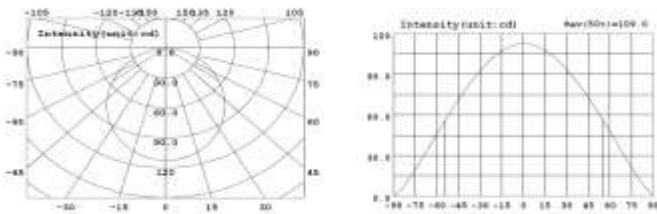

Height Lux Diameter

40090014-DIM-GU10(NW) 110°

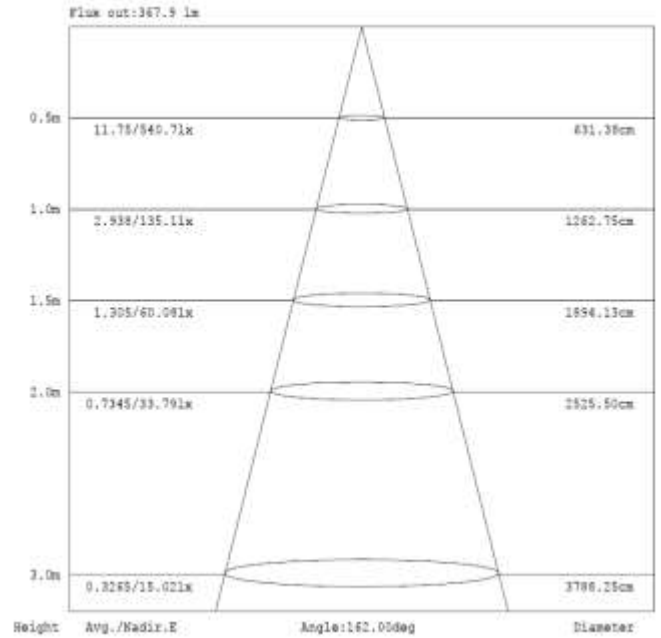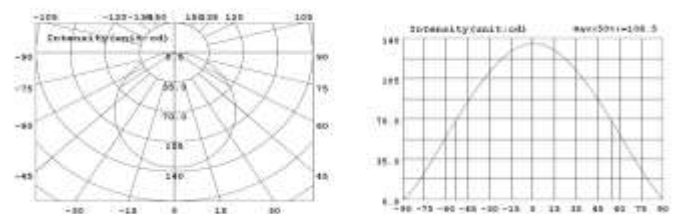

Height Lux Diameter



Important Caution

- Not suitable for high temperature and moisture area.
- Not suitable for heavy air-polluted area.
- Not suitable for close system fixture.